



TEMP CONTROL SPECIALIST

BIOMEDICAL COMBINED REFRIGERATOR & FREEZER

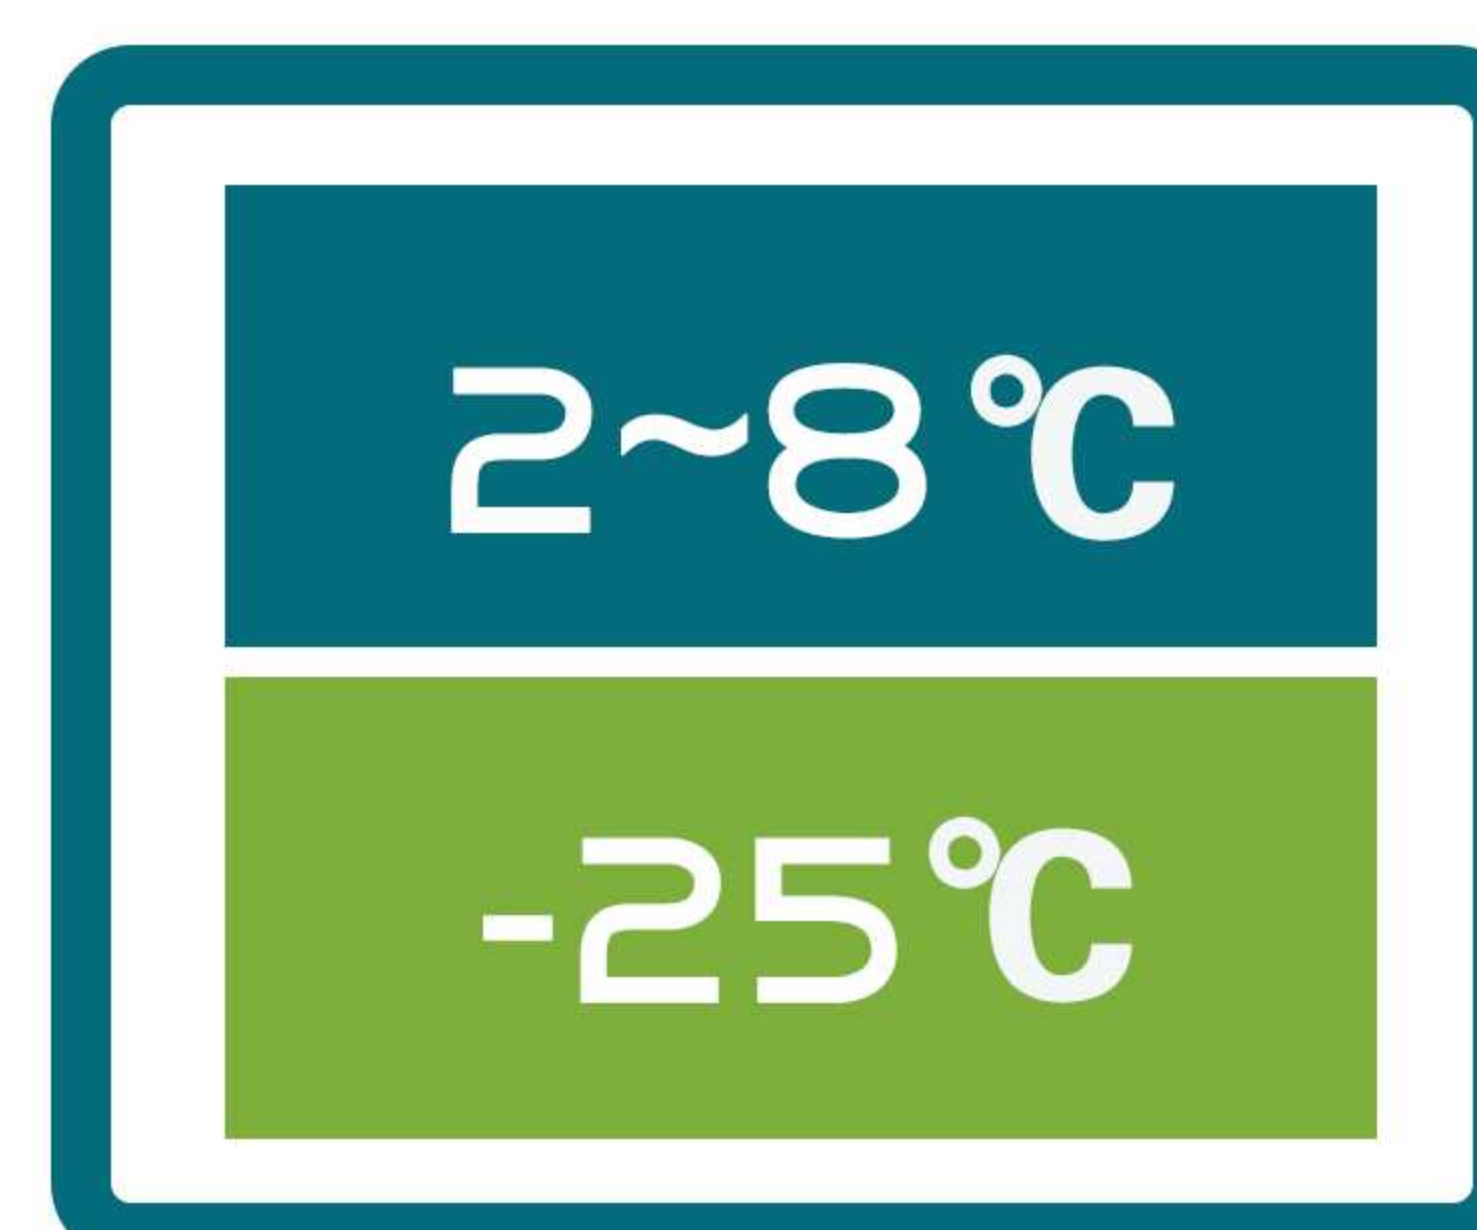

Safe

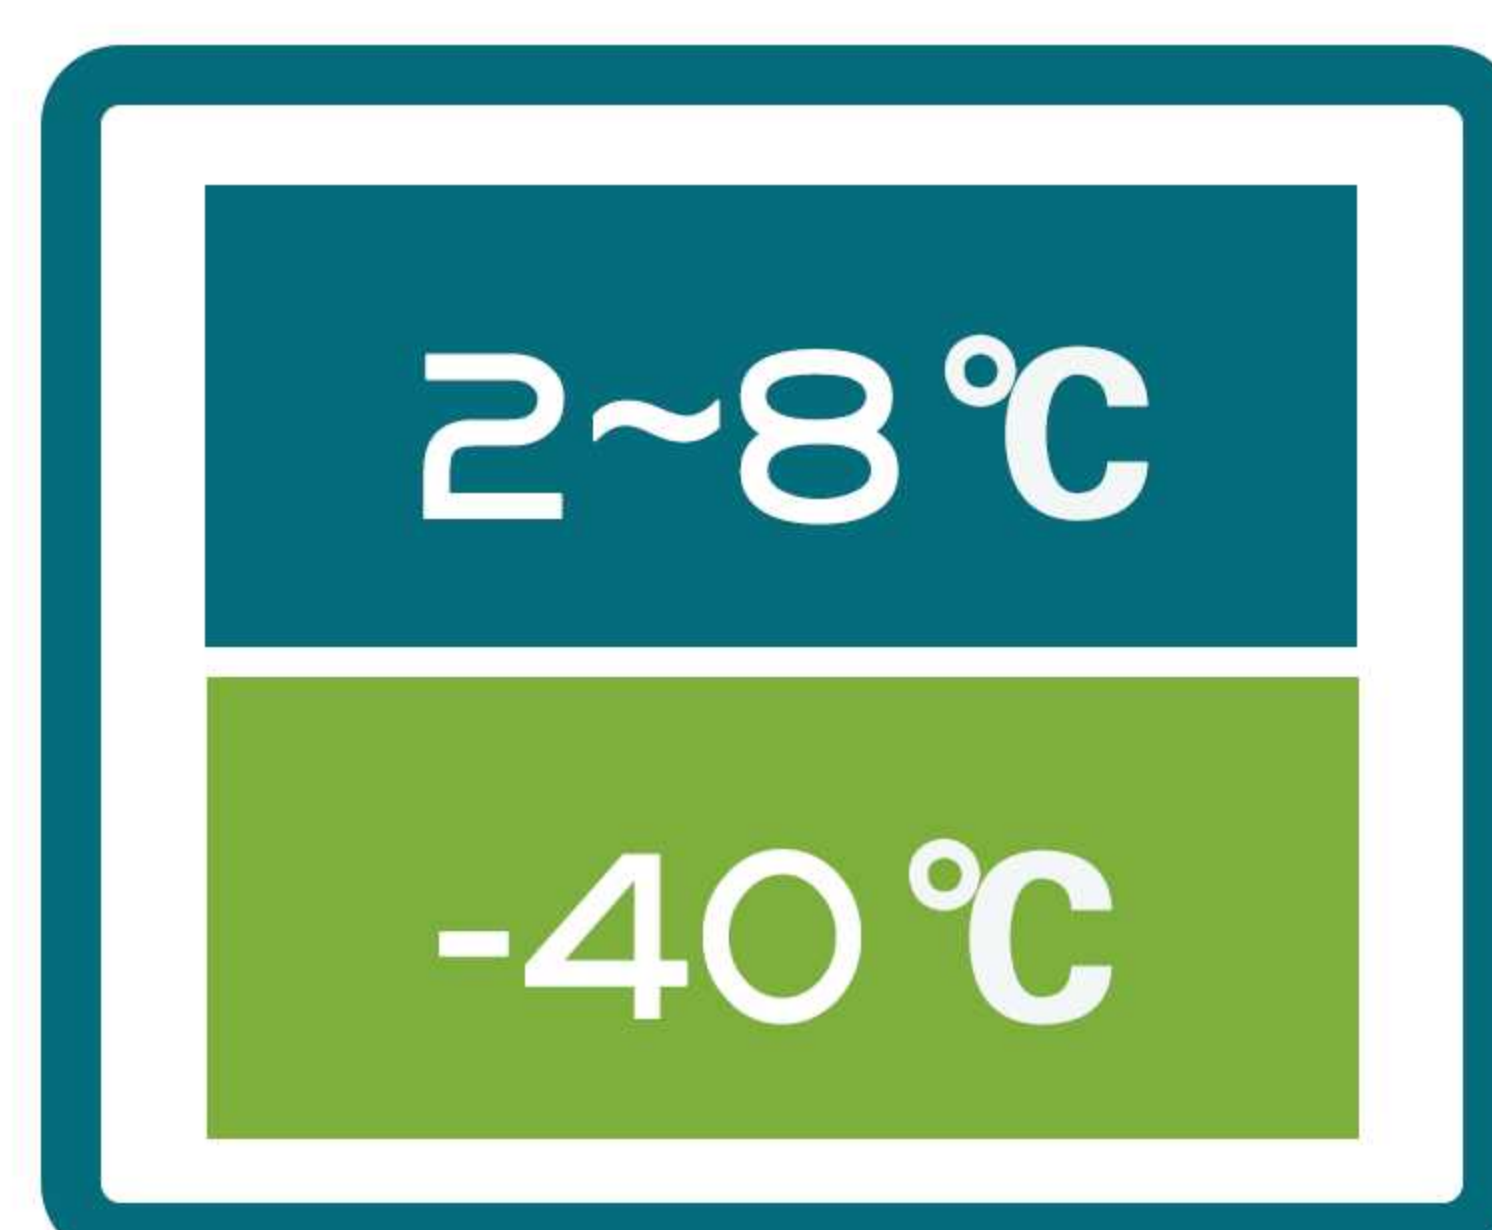

Stable



Eco



CFC-free



Alarms



COMBINED REFRIGERATOR & FREEZER



Pre-Freezing



Life science



Chemical Storage



Culture



Bio-sample



Reagents



Frozen Plasma



Enzymes



Pre-Freezing



Clinical



Pharmaceutical



Vaccines



TEMPERATURE CONTROL TECHNOLOGY

» Dual cooling system

This unit is equipped with two independent cooling systems, one for the upper compartment and one for the lower compartment. Each system has its own independent control system, allowing for individual temperature settings.

» Ultimate uniformity

The chambers maintain temperatures within $\pm 3^{\circ}\text{C}$ throughout the entire compartment, ensuring confidence that items are stored at the correct temperature regardless of their placement in the chamber.

» Excellent insulation performance


All units are filled with thick, high-density PU foam, providing excellent insulation.

» Fast recovery

Faster temperature recovery even after prolonged door openings. The high efficient cooling system maintains consistent temperatures, ensuring that preservations are stored at the right temperature even when the unit is opened frequently.

» Optimized fluctuation

Maintain superior temperature stability, avoiding rapid and significant changes in temperature. This ensures that samples, medications, vaccines, and blood therapies are consistently stored in their optimal environment, without compromise.


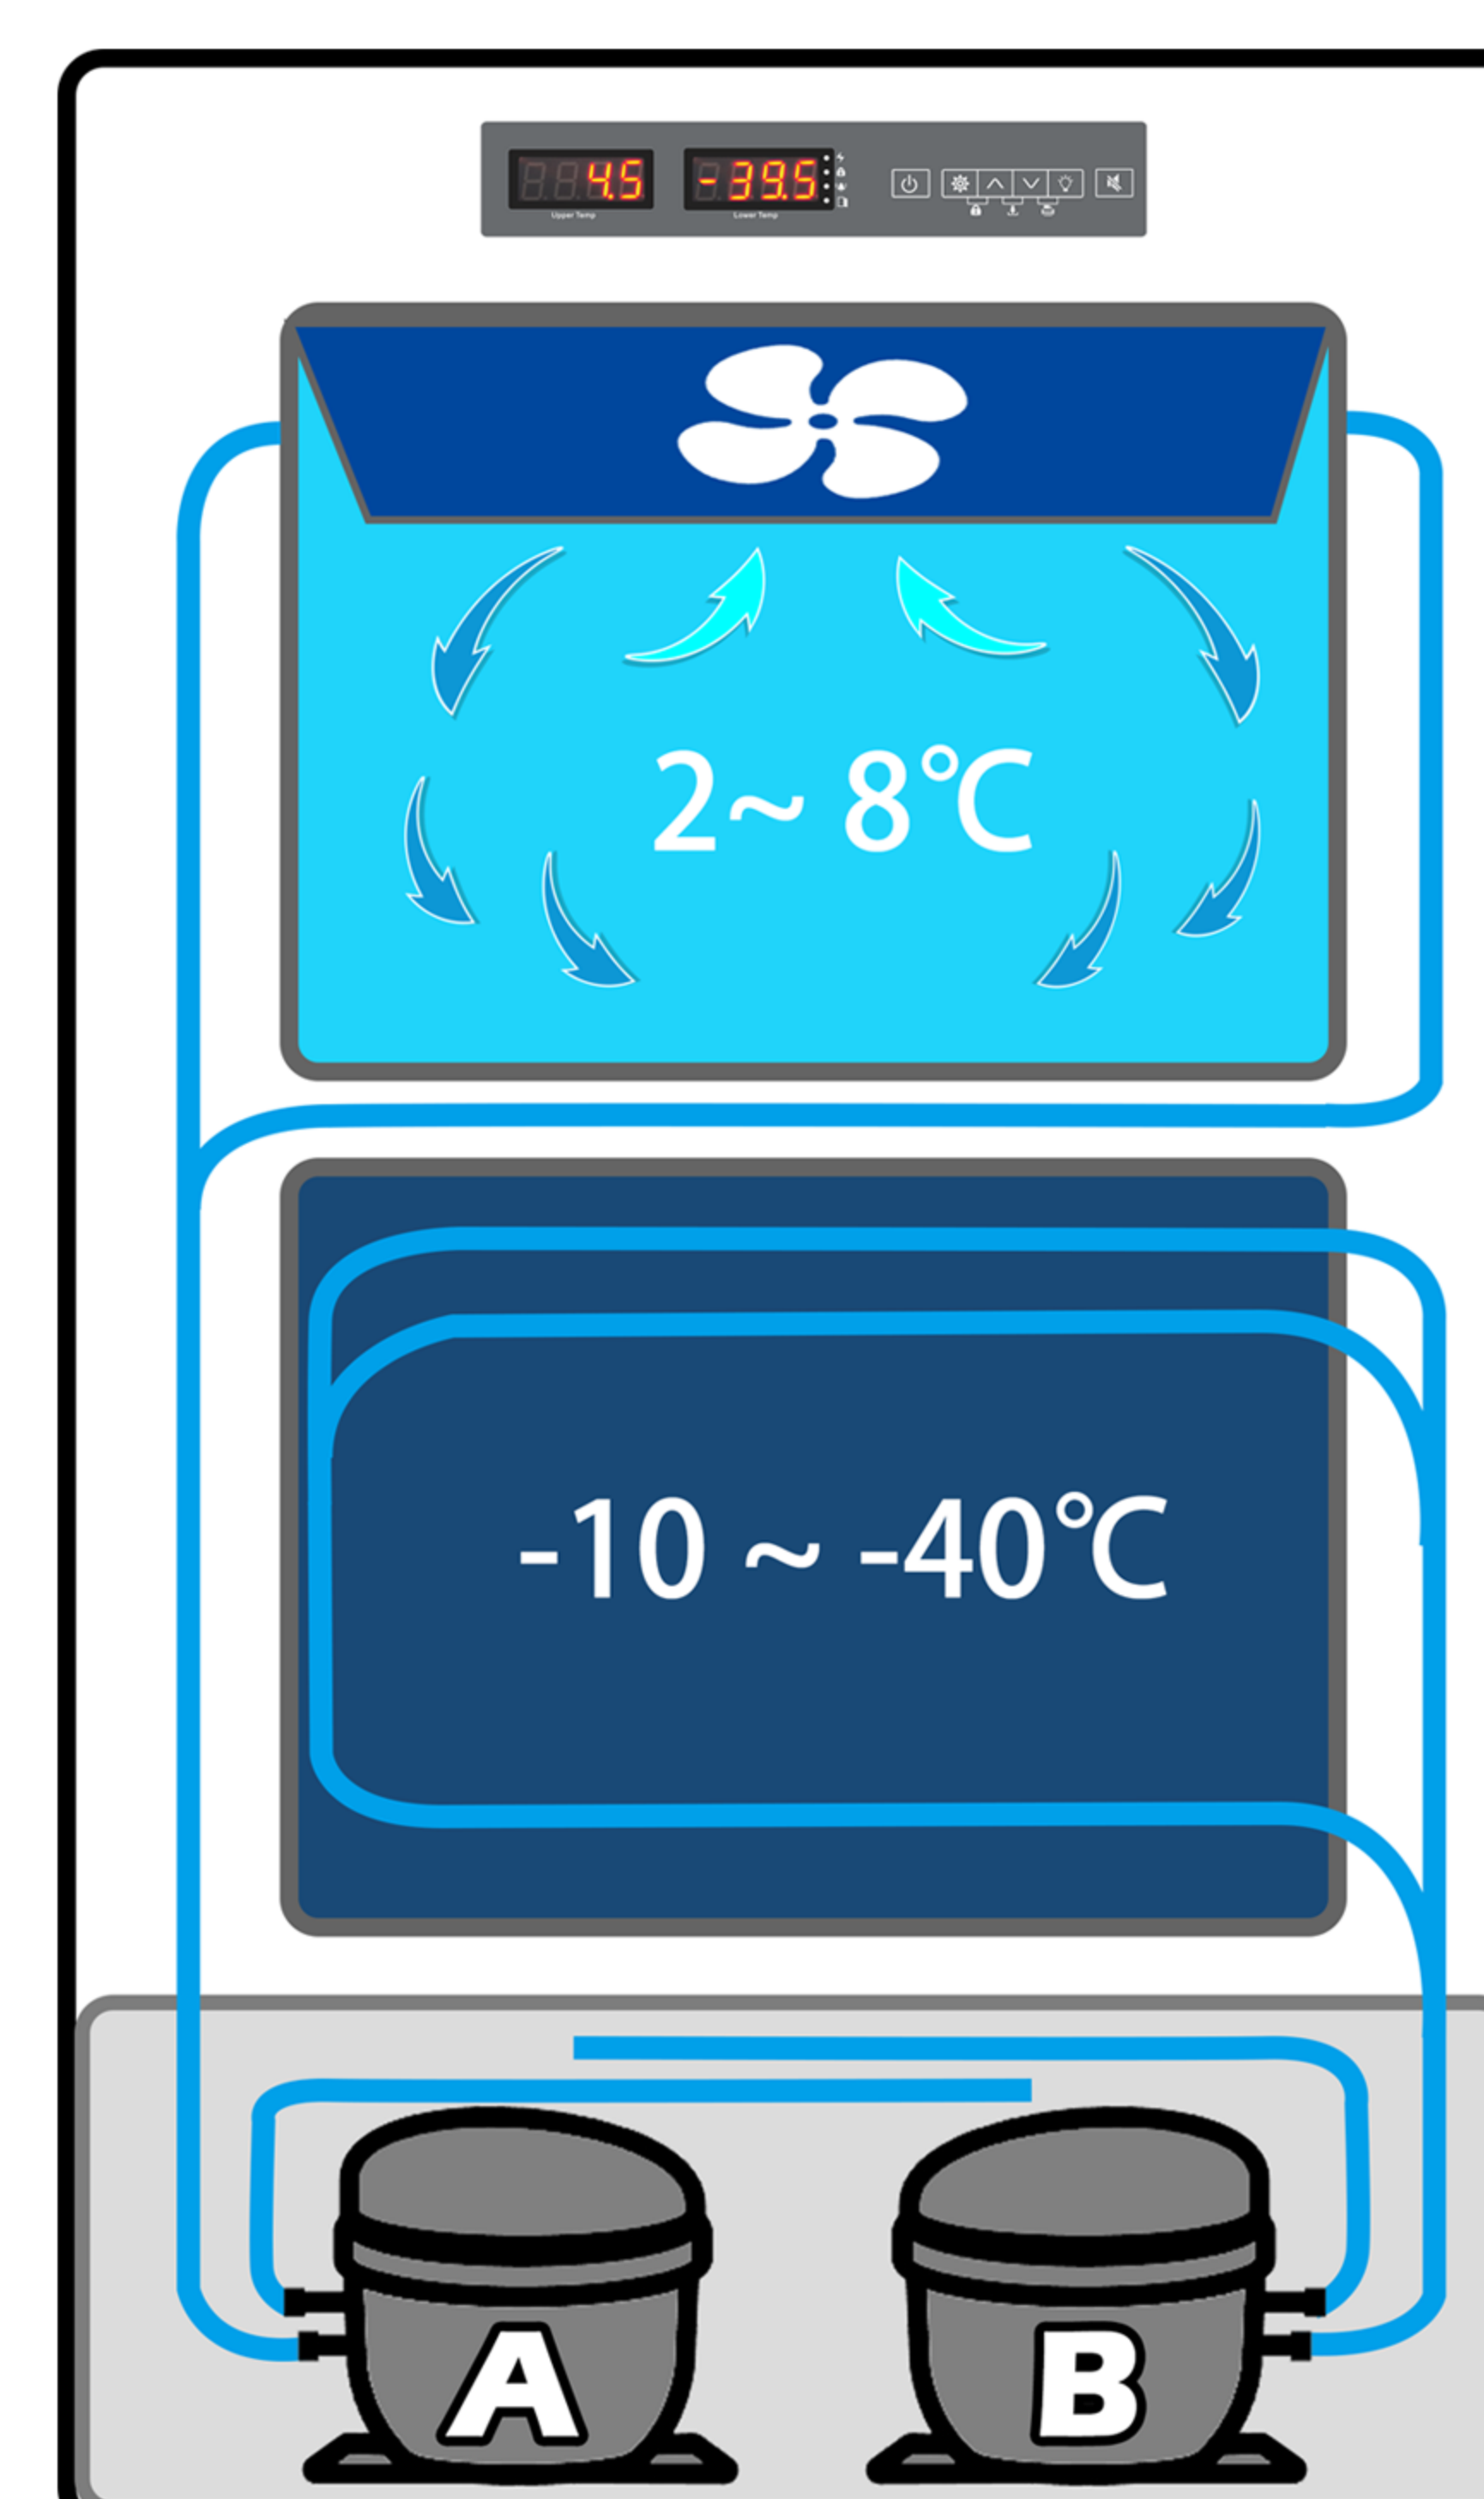


Refrigerator Compartment

- » Forced air cooling system
- » Fan-assisted circulation
- » Uniform air distribution

Freezer Compartment

- » Static cooling system
- » Copper tube evaporator
- » Pressure equalization

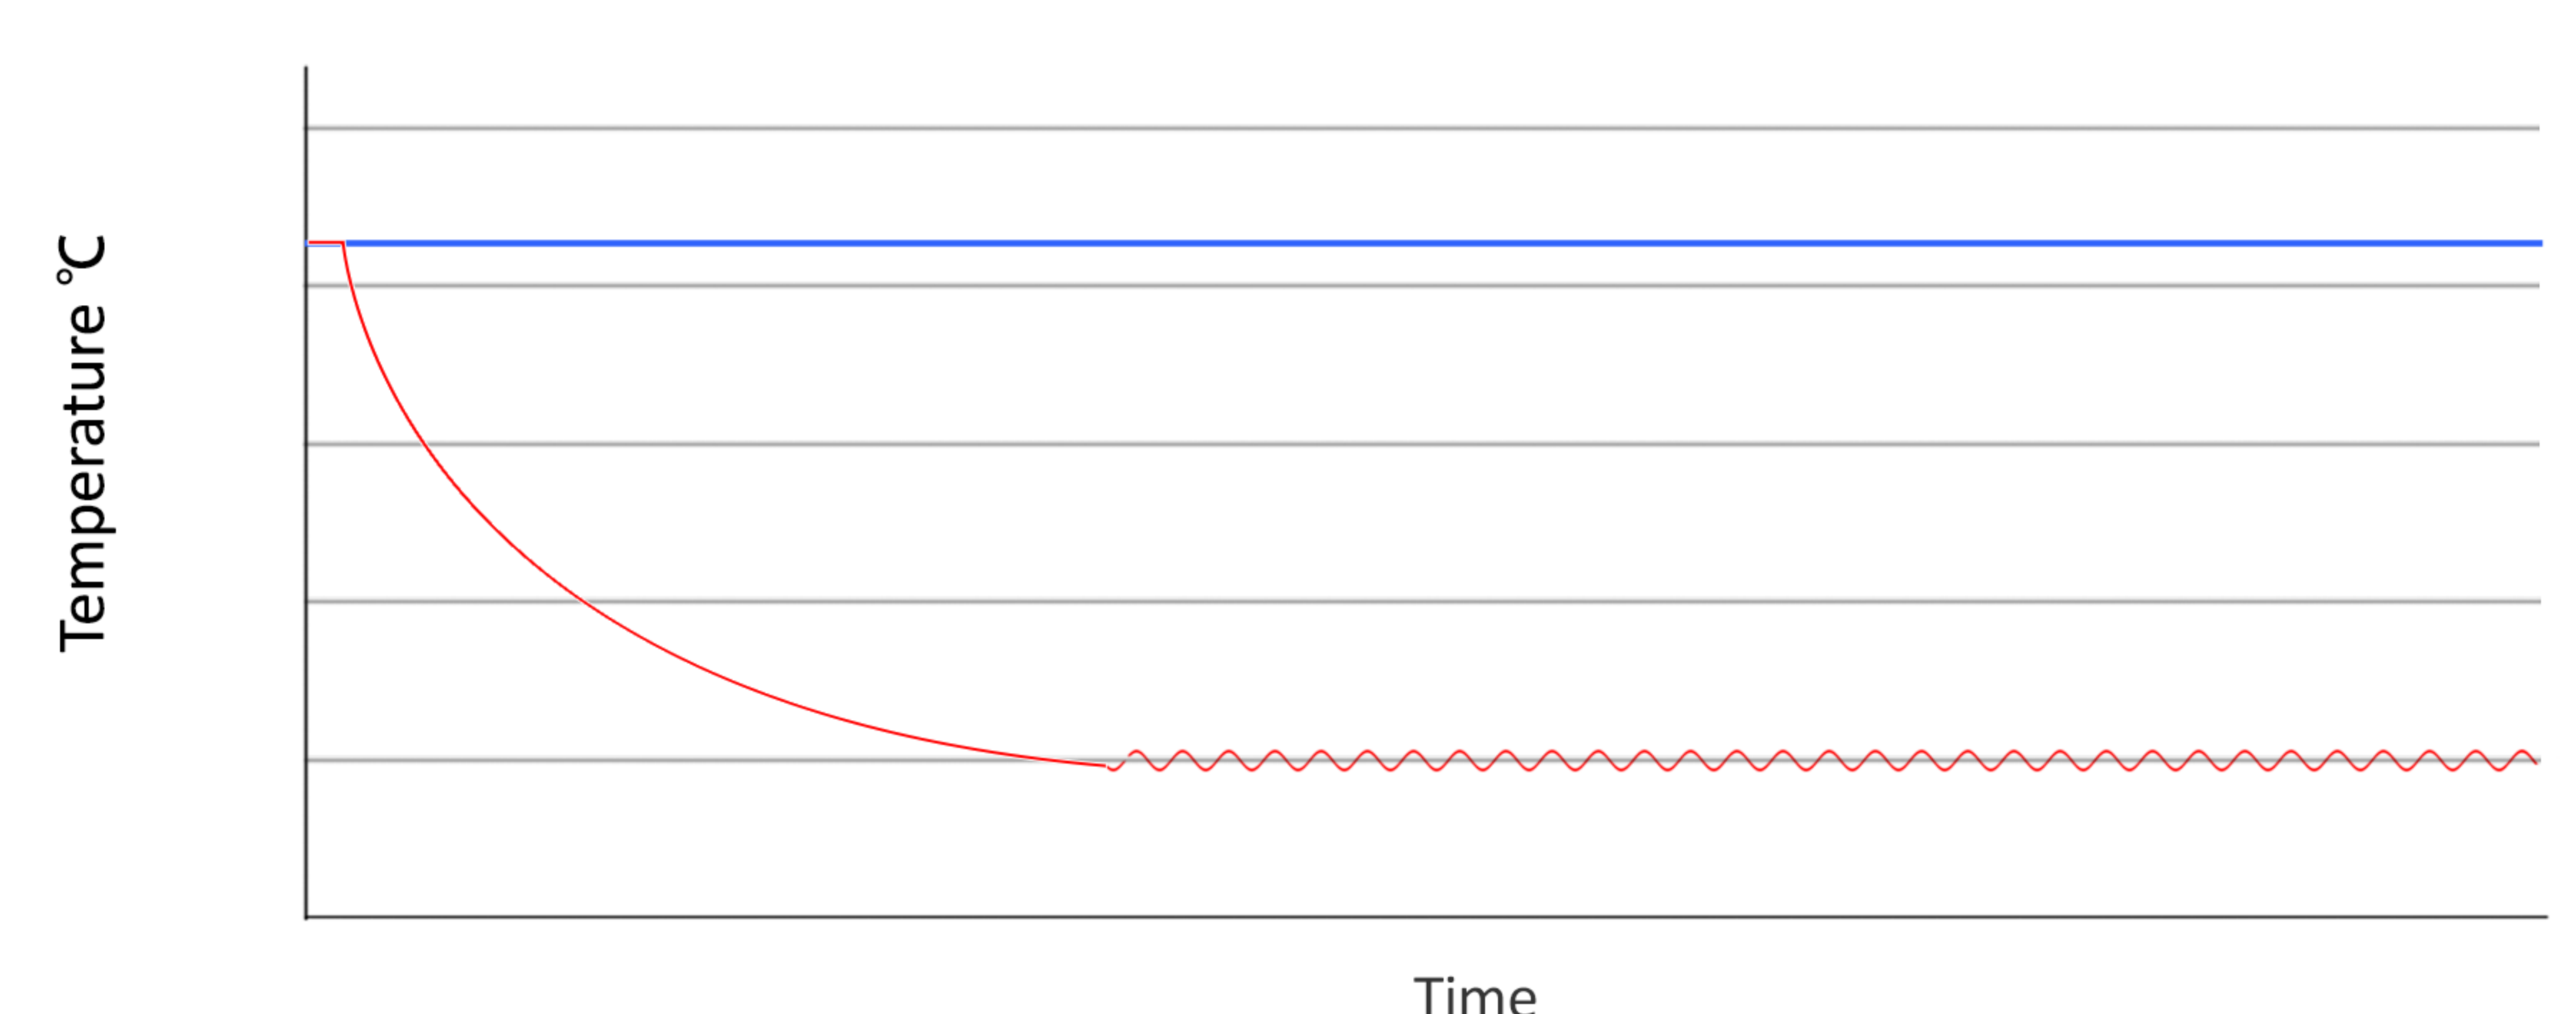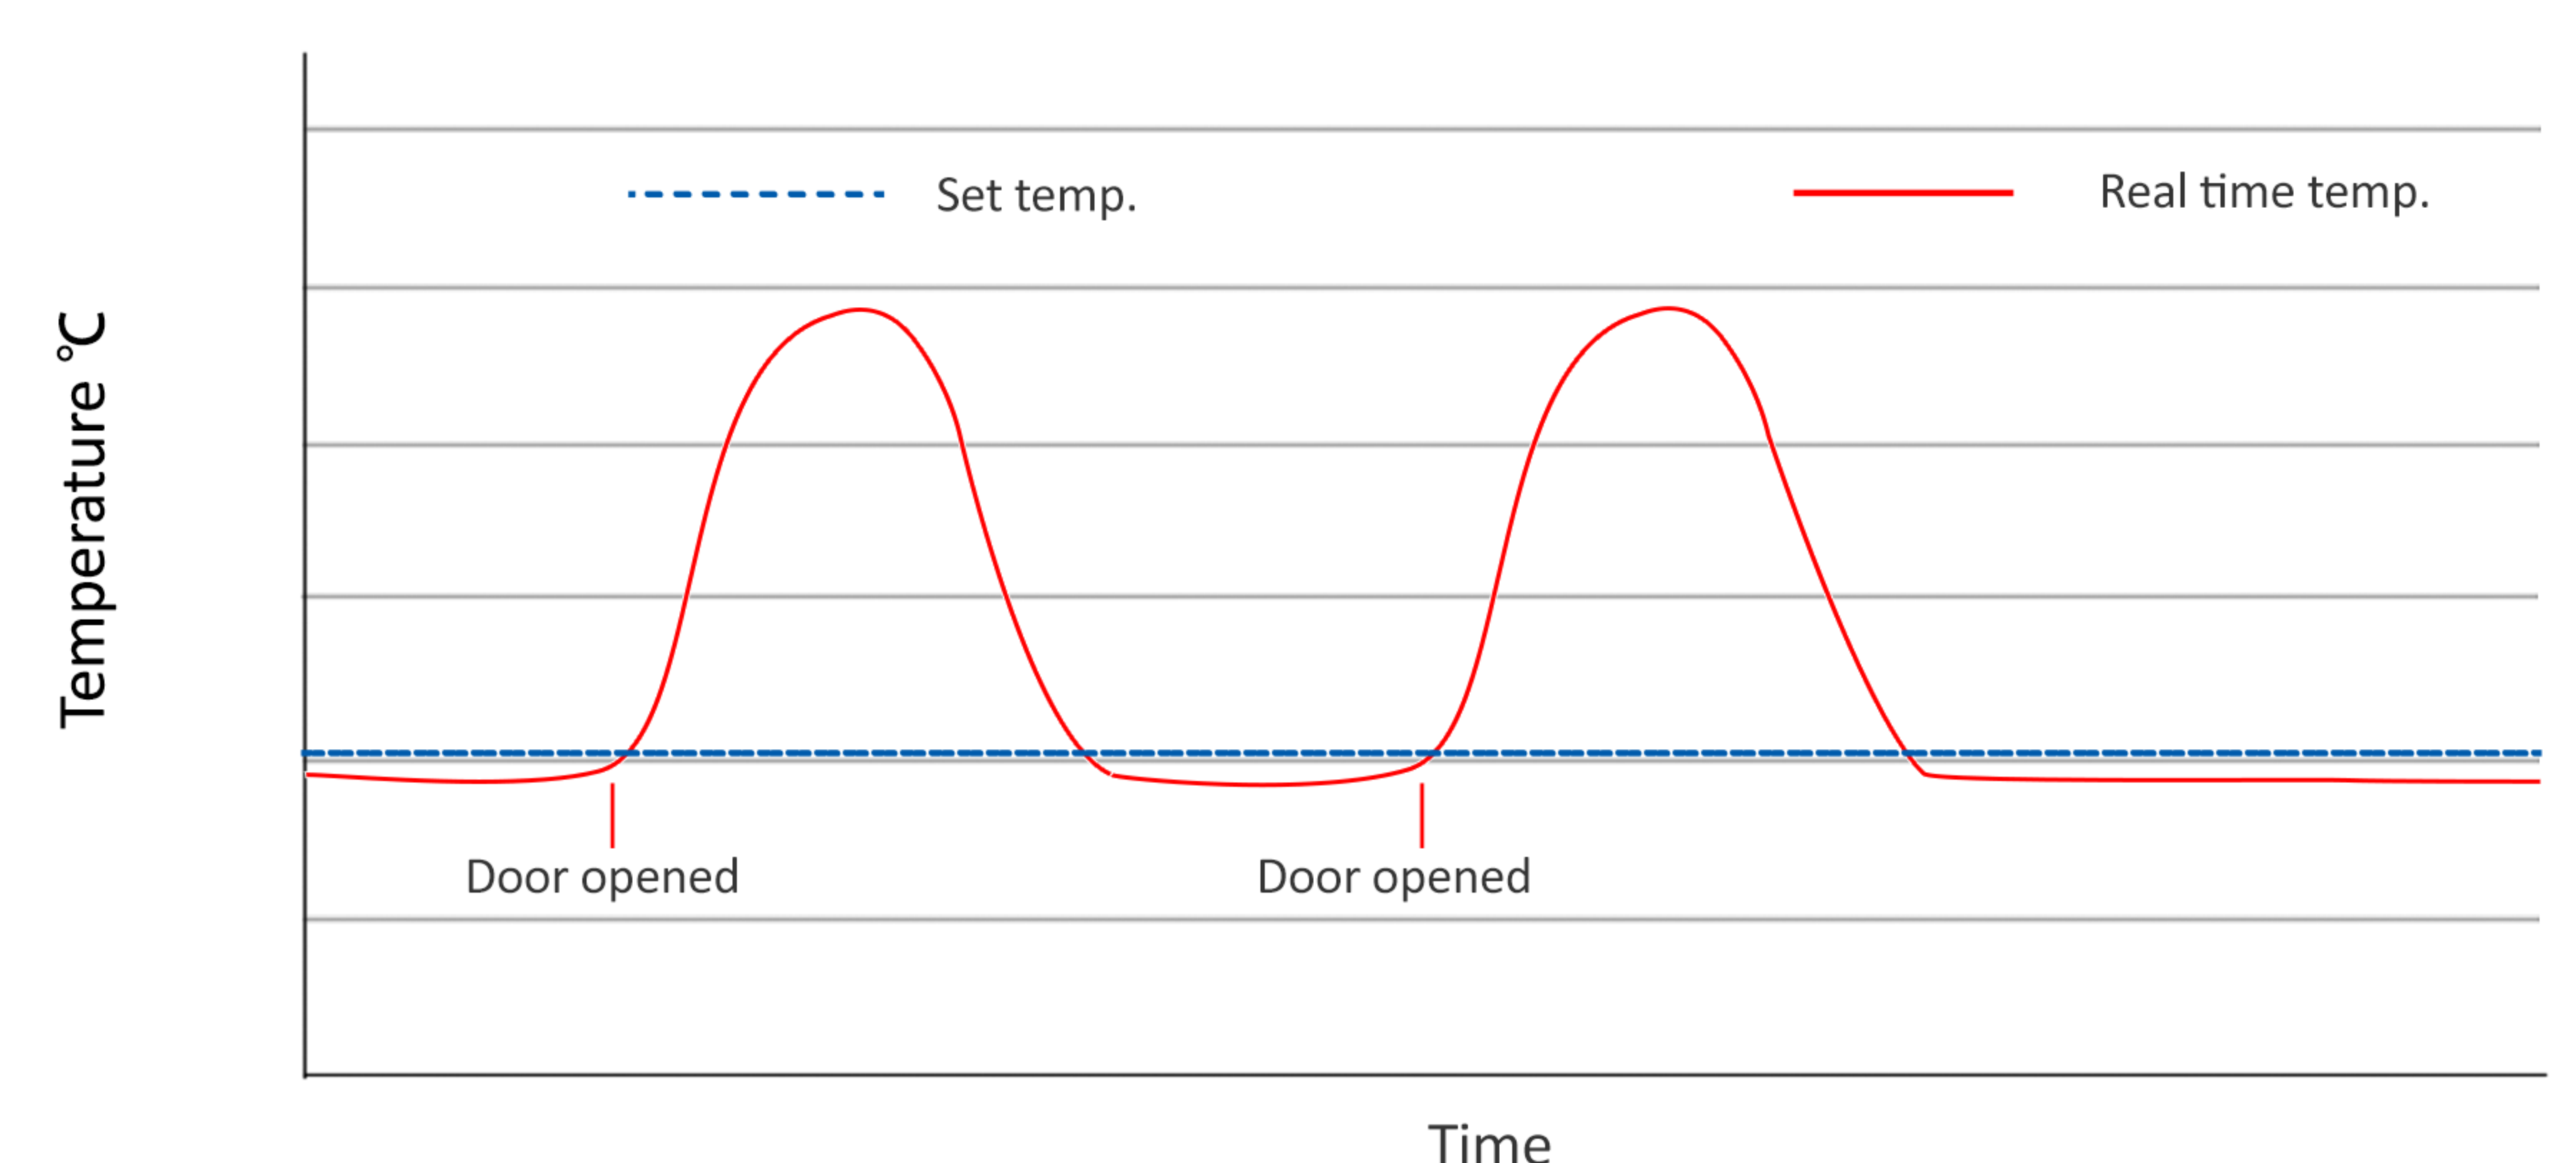

COMBINED REFRIGERATOR & FREEZER



Safe storage

to safeguard patient samples and ensure medications remain efficacious.



Precise temp control

to ensure stable and accurate temperatures in the chamber



User-friendly

to bring convenience and easy maintenance to users




Eco-friendly

to reduce operating costs, provide a quiet working environment and support sustainability initiatives



GUIDE TO MODELS

Find out the model you need quickly

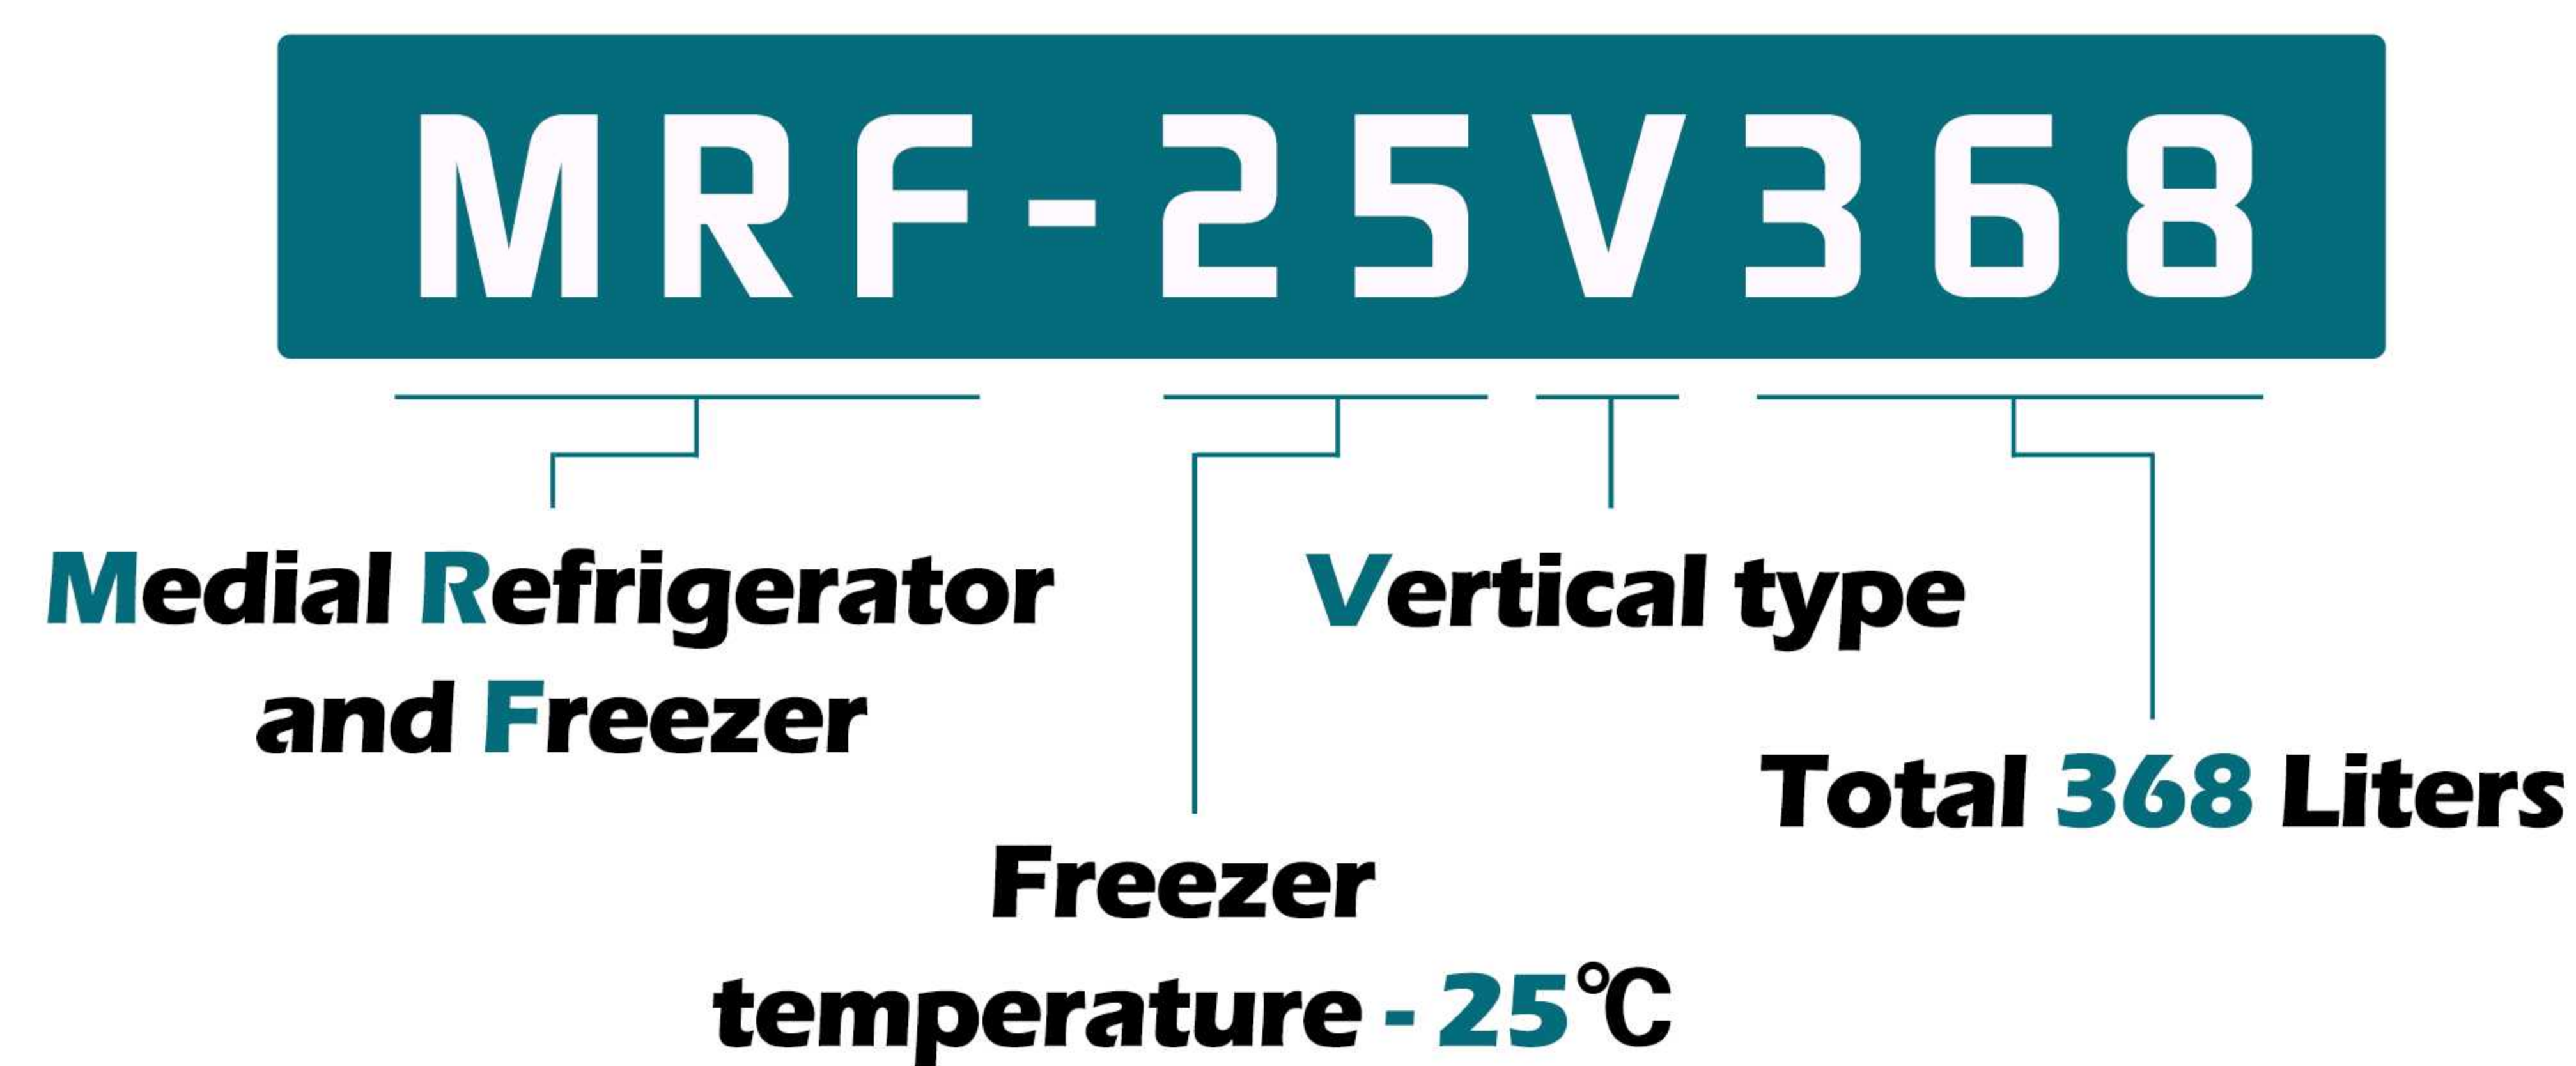

ECO-FRIENDLY & USER-FRIENDLY



Natural Refrigerants

Sustainable U.S. EPA, SNAP, and EU F-Gas compliant natural refrigerants and foaming agents support sustainability initiatives. The cooling system uses **R290 or R600a** which are environmentally friendly, having no impact on ozone depletion and a very low Global Warming Potential (GWP) grade.



High-efficiency cooling system

Operating at a low noise level while still providing efficient cooling, our advanced cooling technology offers lower energy consumption and better user experiences.

MRF-40V528



Locks with keys



Cold air distribution system for the refrigerator



Glycerine box with sensor inside



Removable drawers

Built-in locks

Ensures the security of your preservations

LED lighting

Smart lighting on and off for convenient access

Fan-assisted evaporator

Highly efficient evaporator with high airflow fans

Glycerine box

Precise temperature control and minimal fluctuations

Adjustable shelves

Easy to remove and install

Removable drawers


For organizing your storage

Padlock hole


For fixing additional padlocks

Universal casters

Brake & leveling feet for easy movement and stable fixation

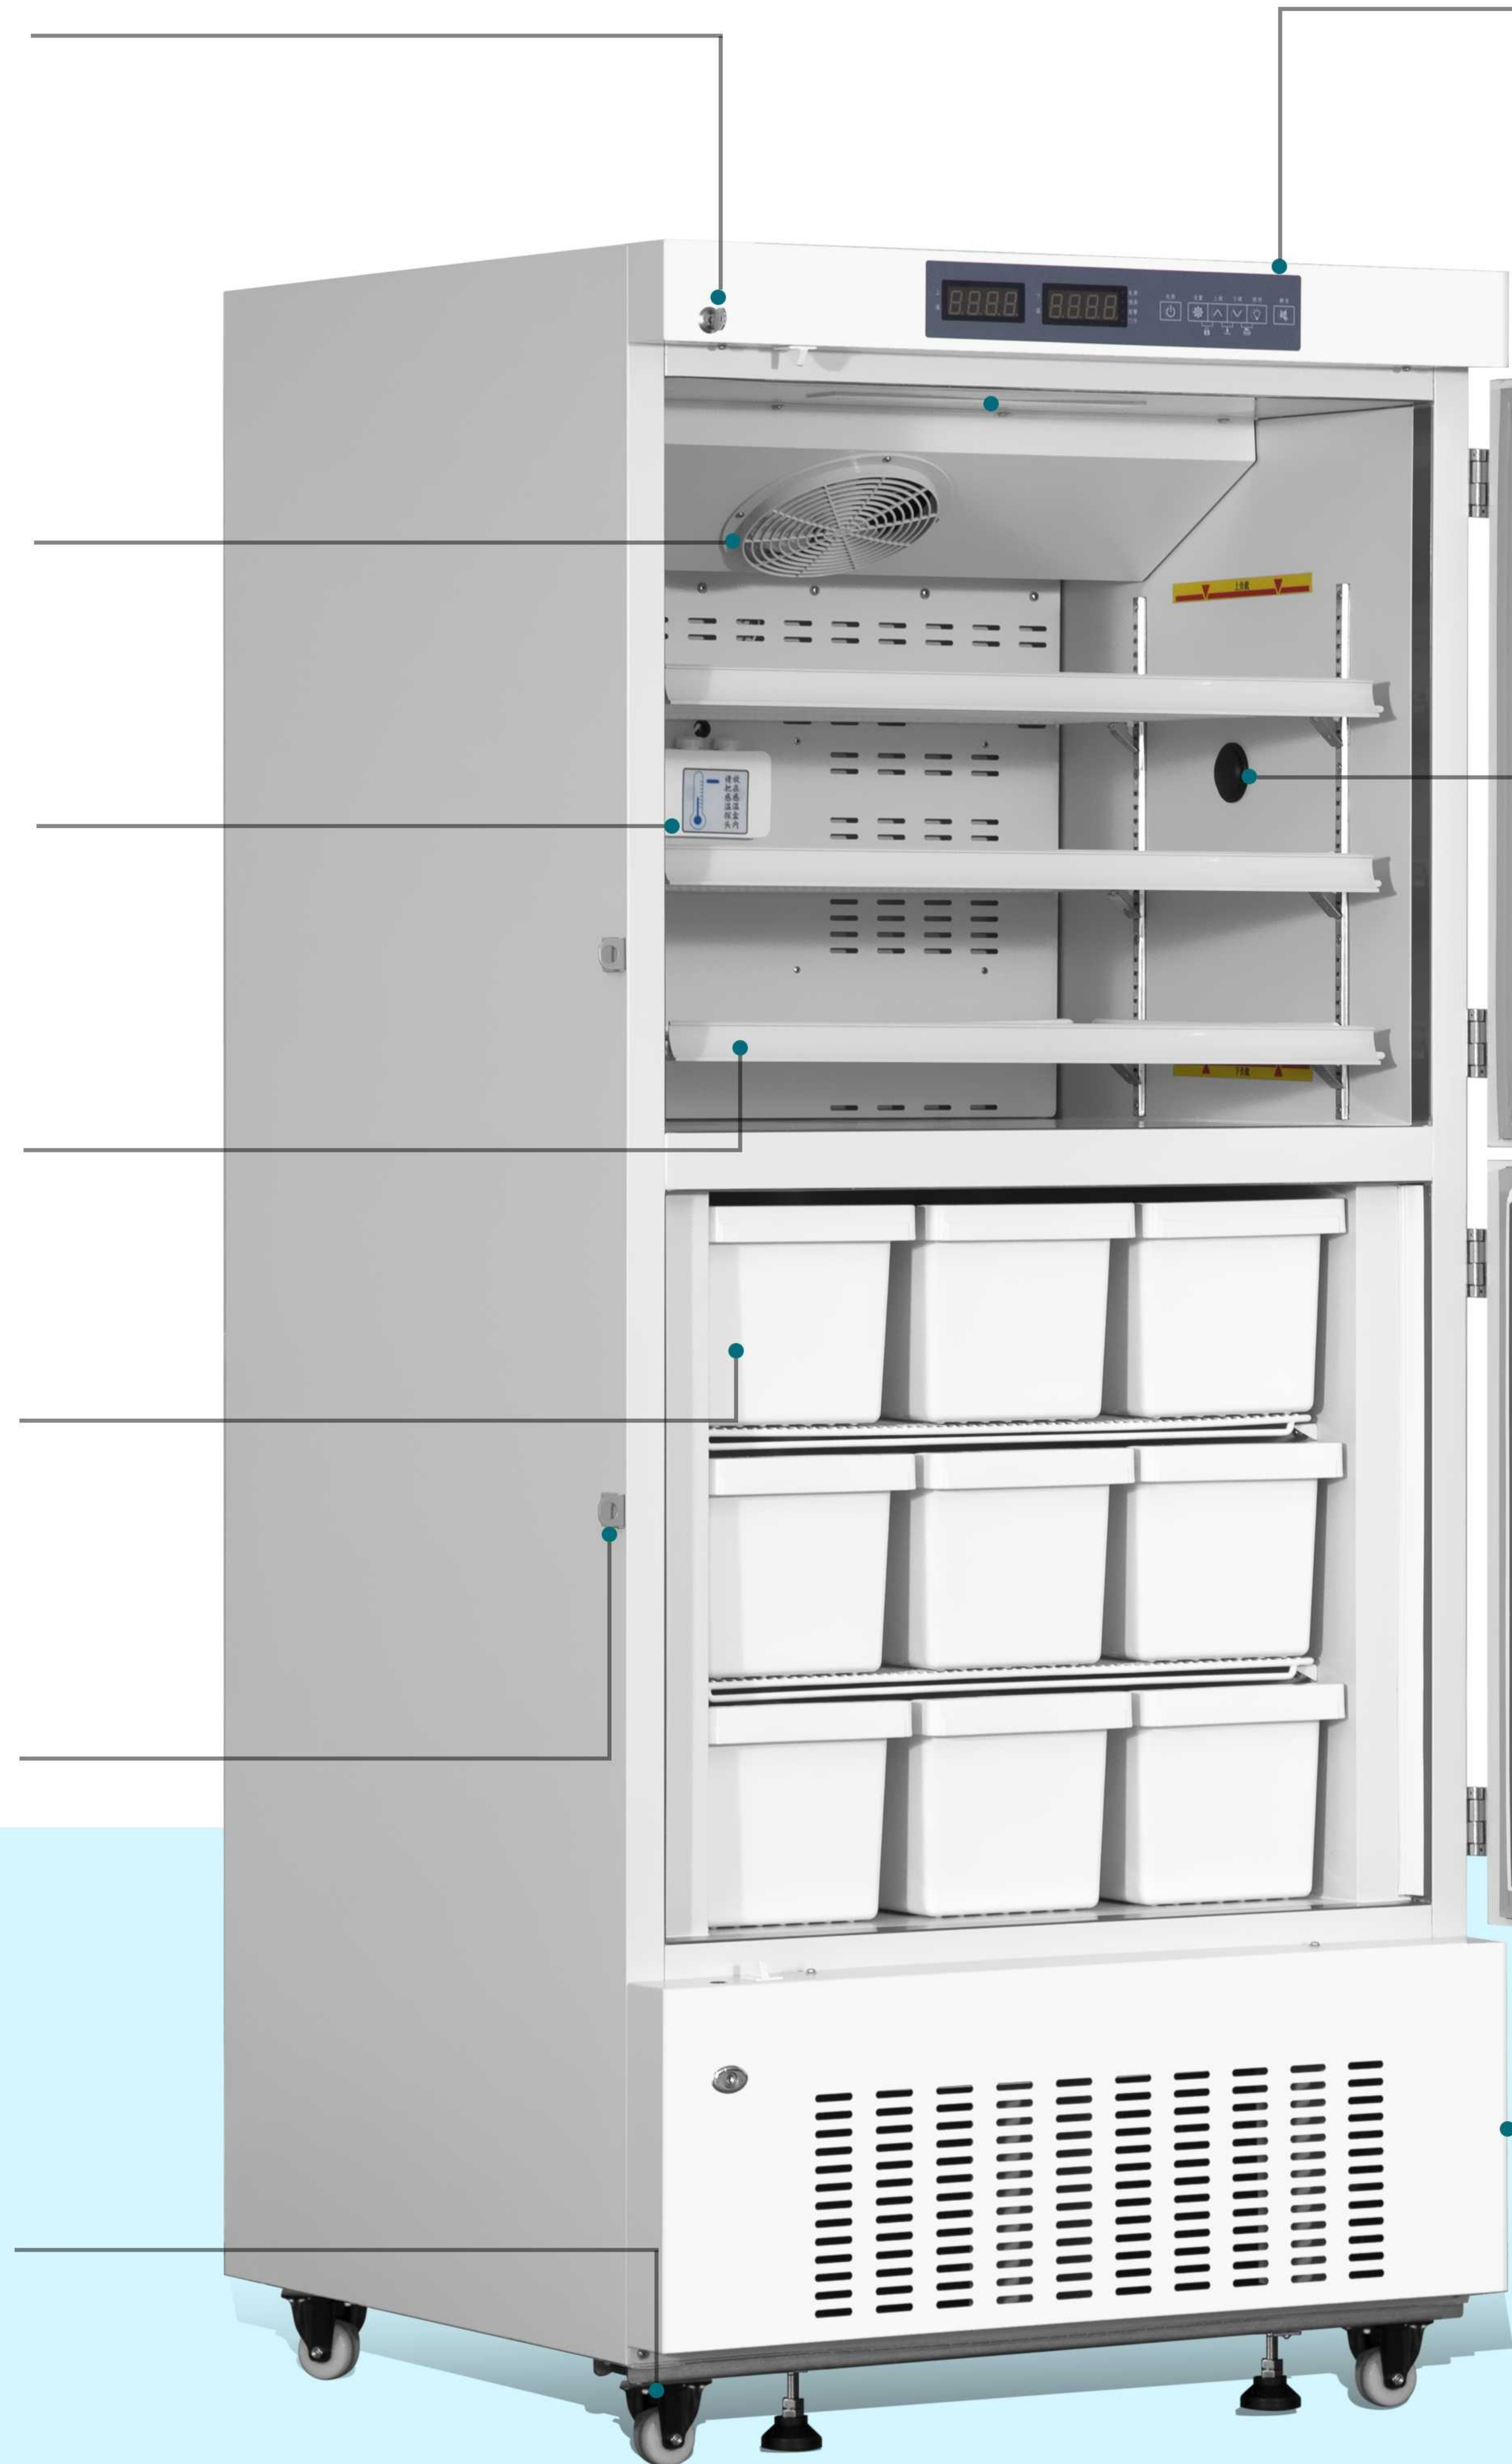


MRF-40V528

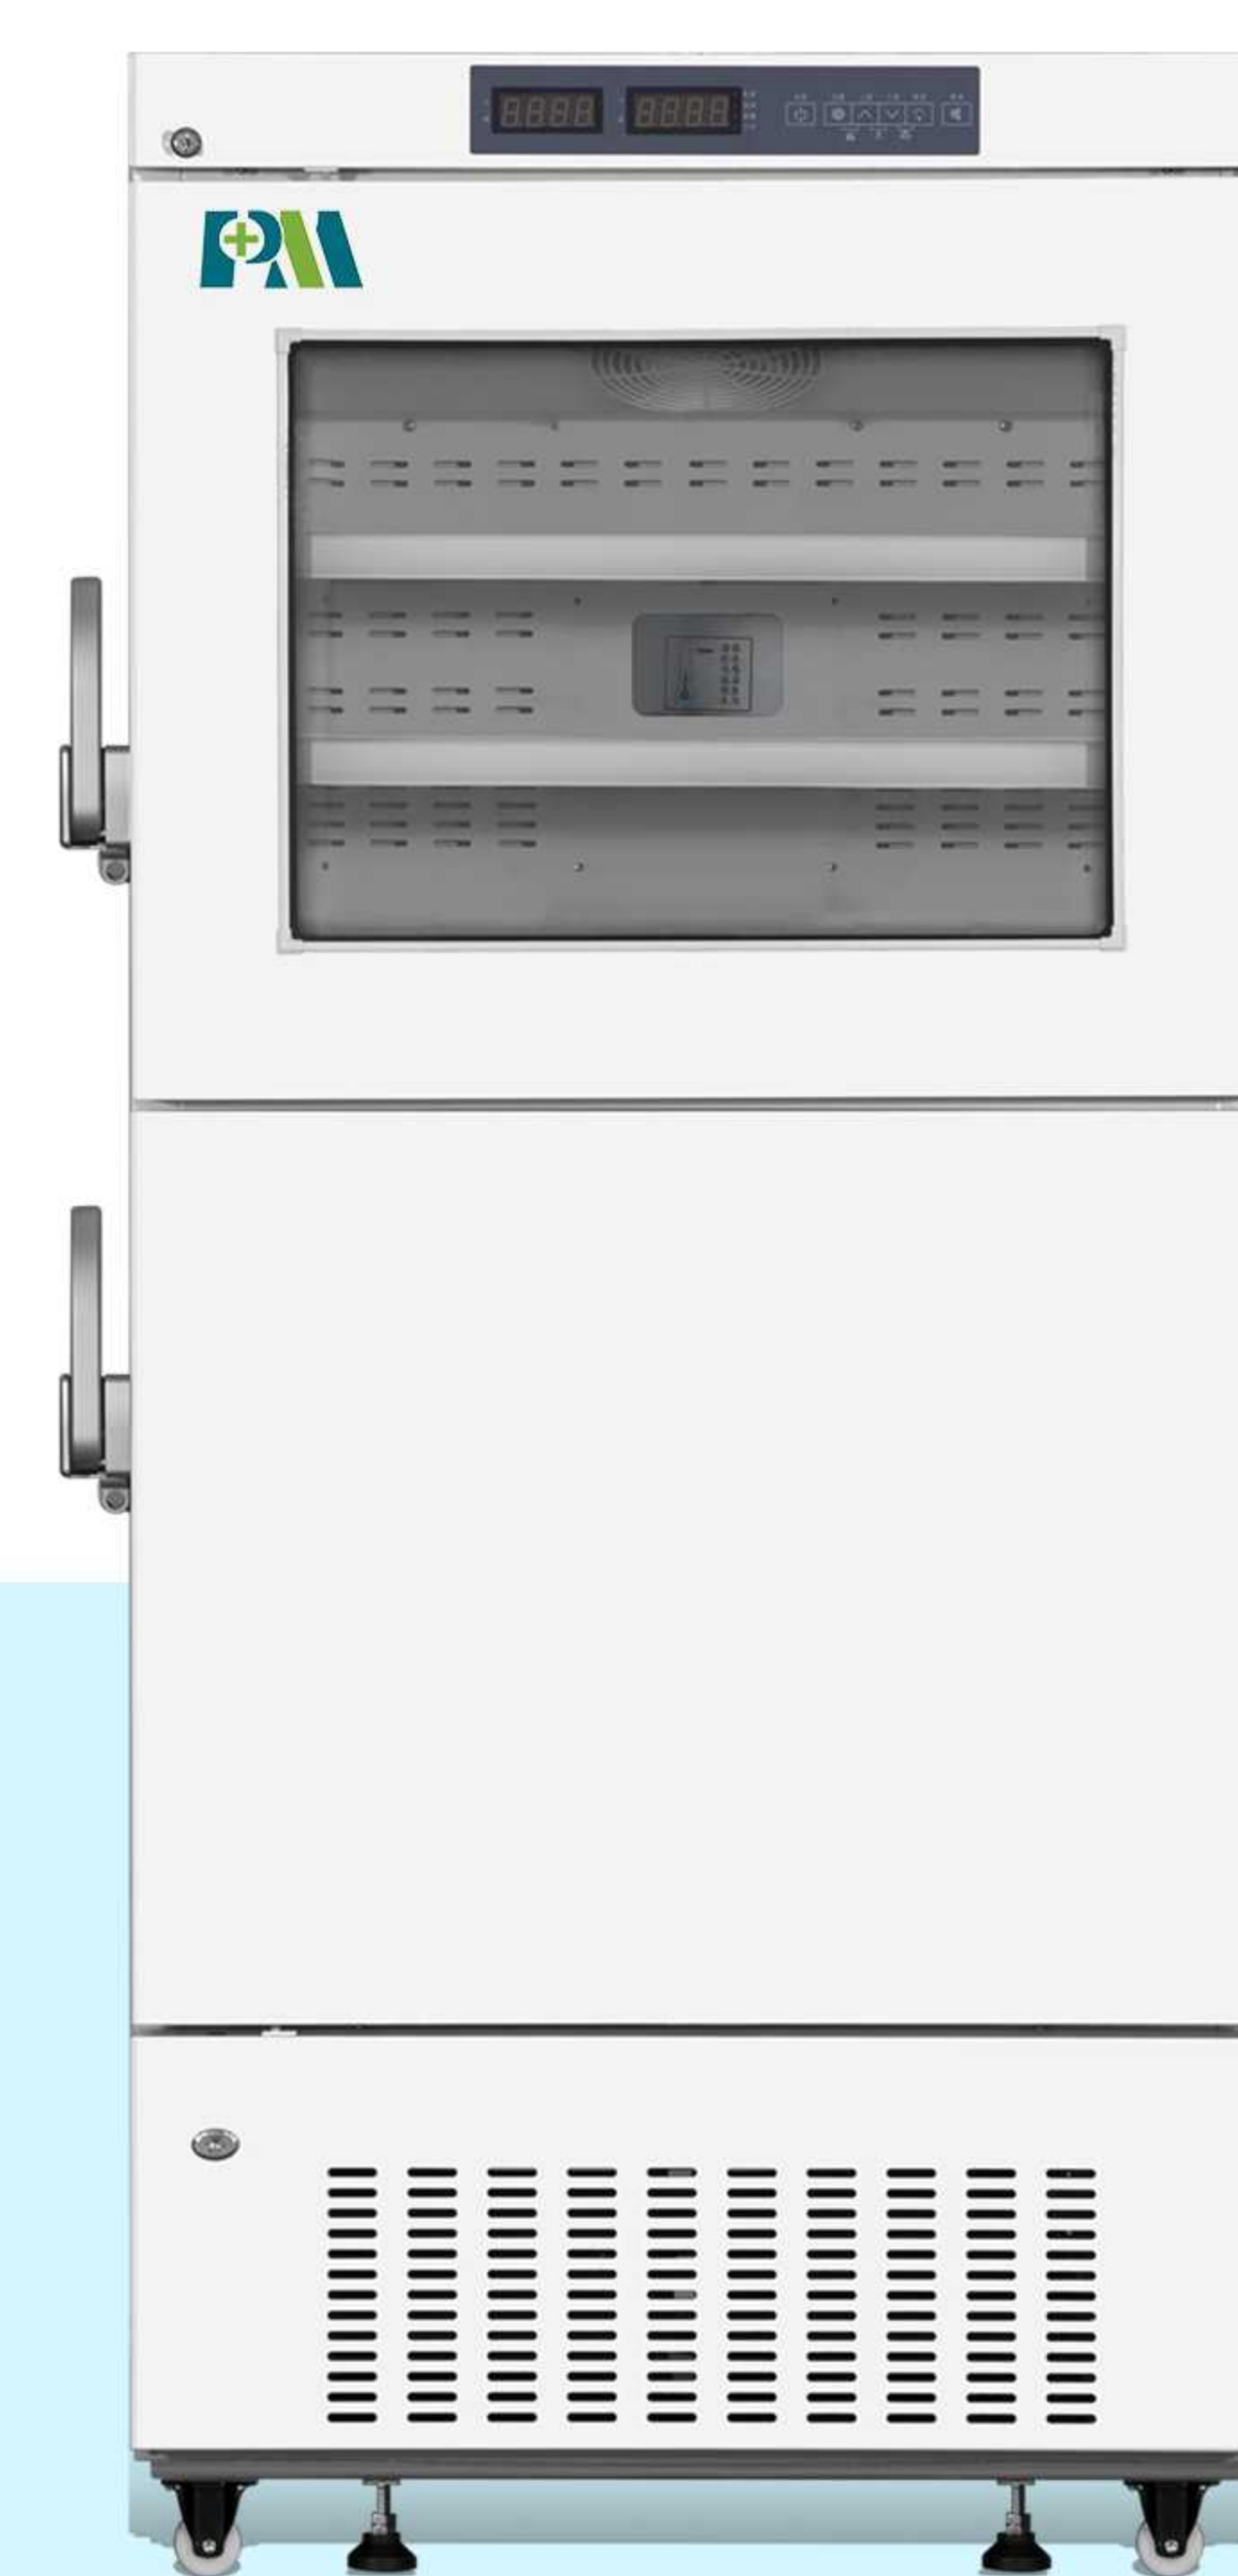

MRF-25V528

Z06-sx Controller

Optional Z06 controller with internal USB data logger

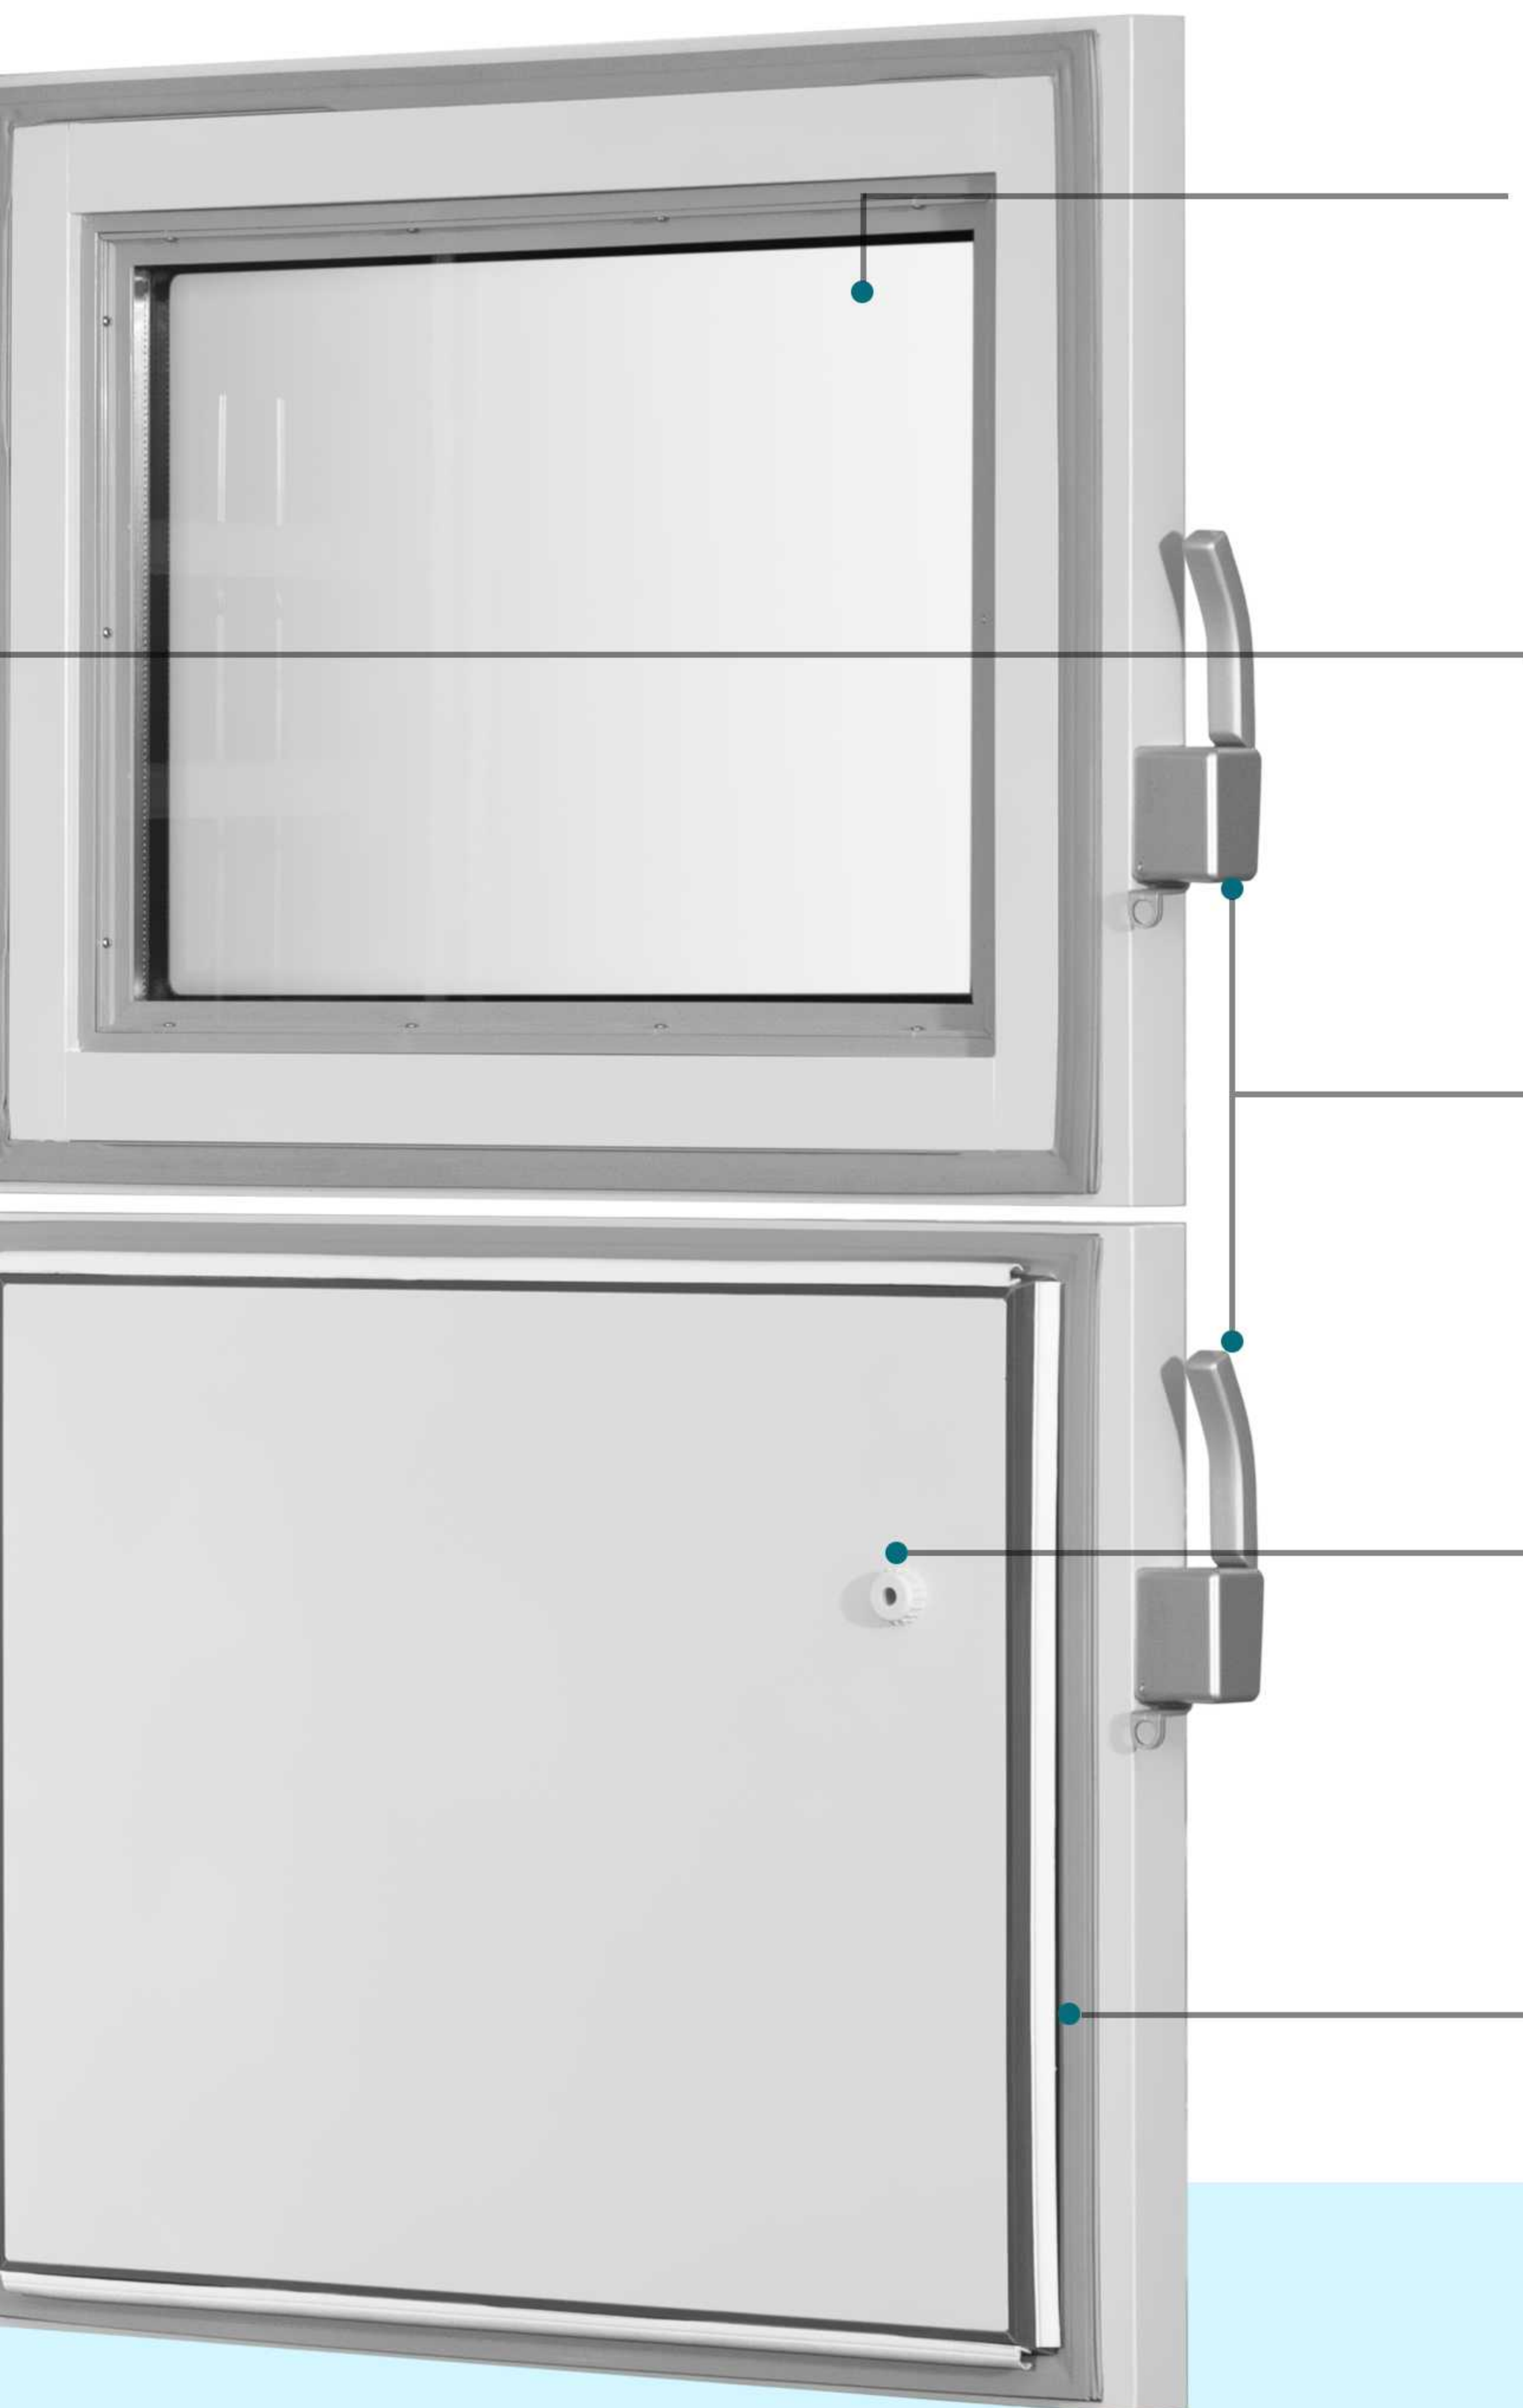

Heated glass

Prevent fogging and condensation

Access ports

Each compartment with 1 dia.25mm ports for additional monitoring device

Ergonomic handles

Easy open for one-hand operation

Equalization Port


Allow a quick re-access to your preservations

Sealing gaskets

Long-lasting magnetic sealing gasket locks in cold air

USB interface

Temperature recording and alarm data can be exported to PDF or Excel file

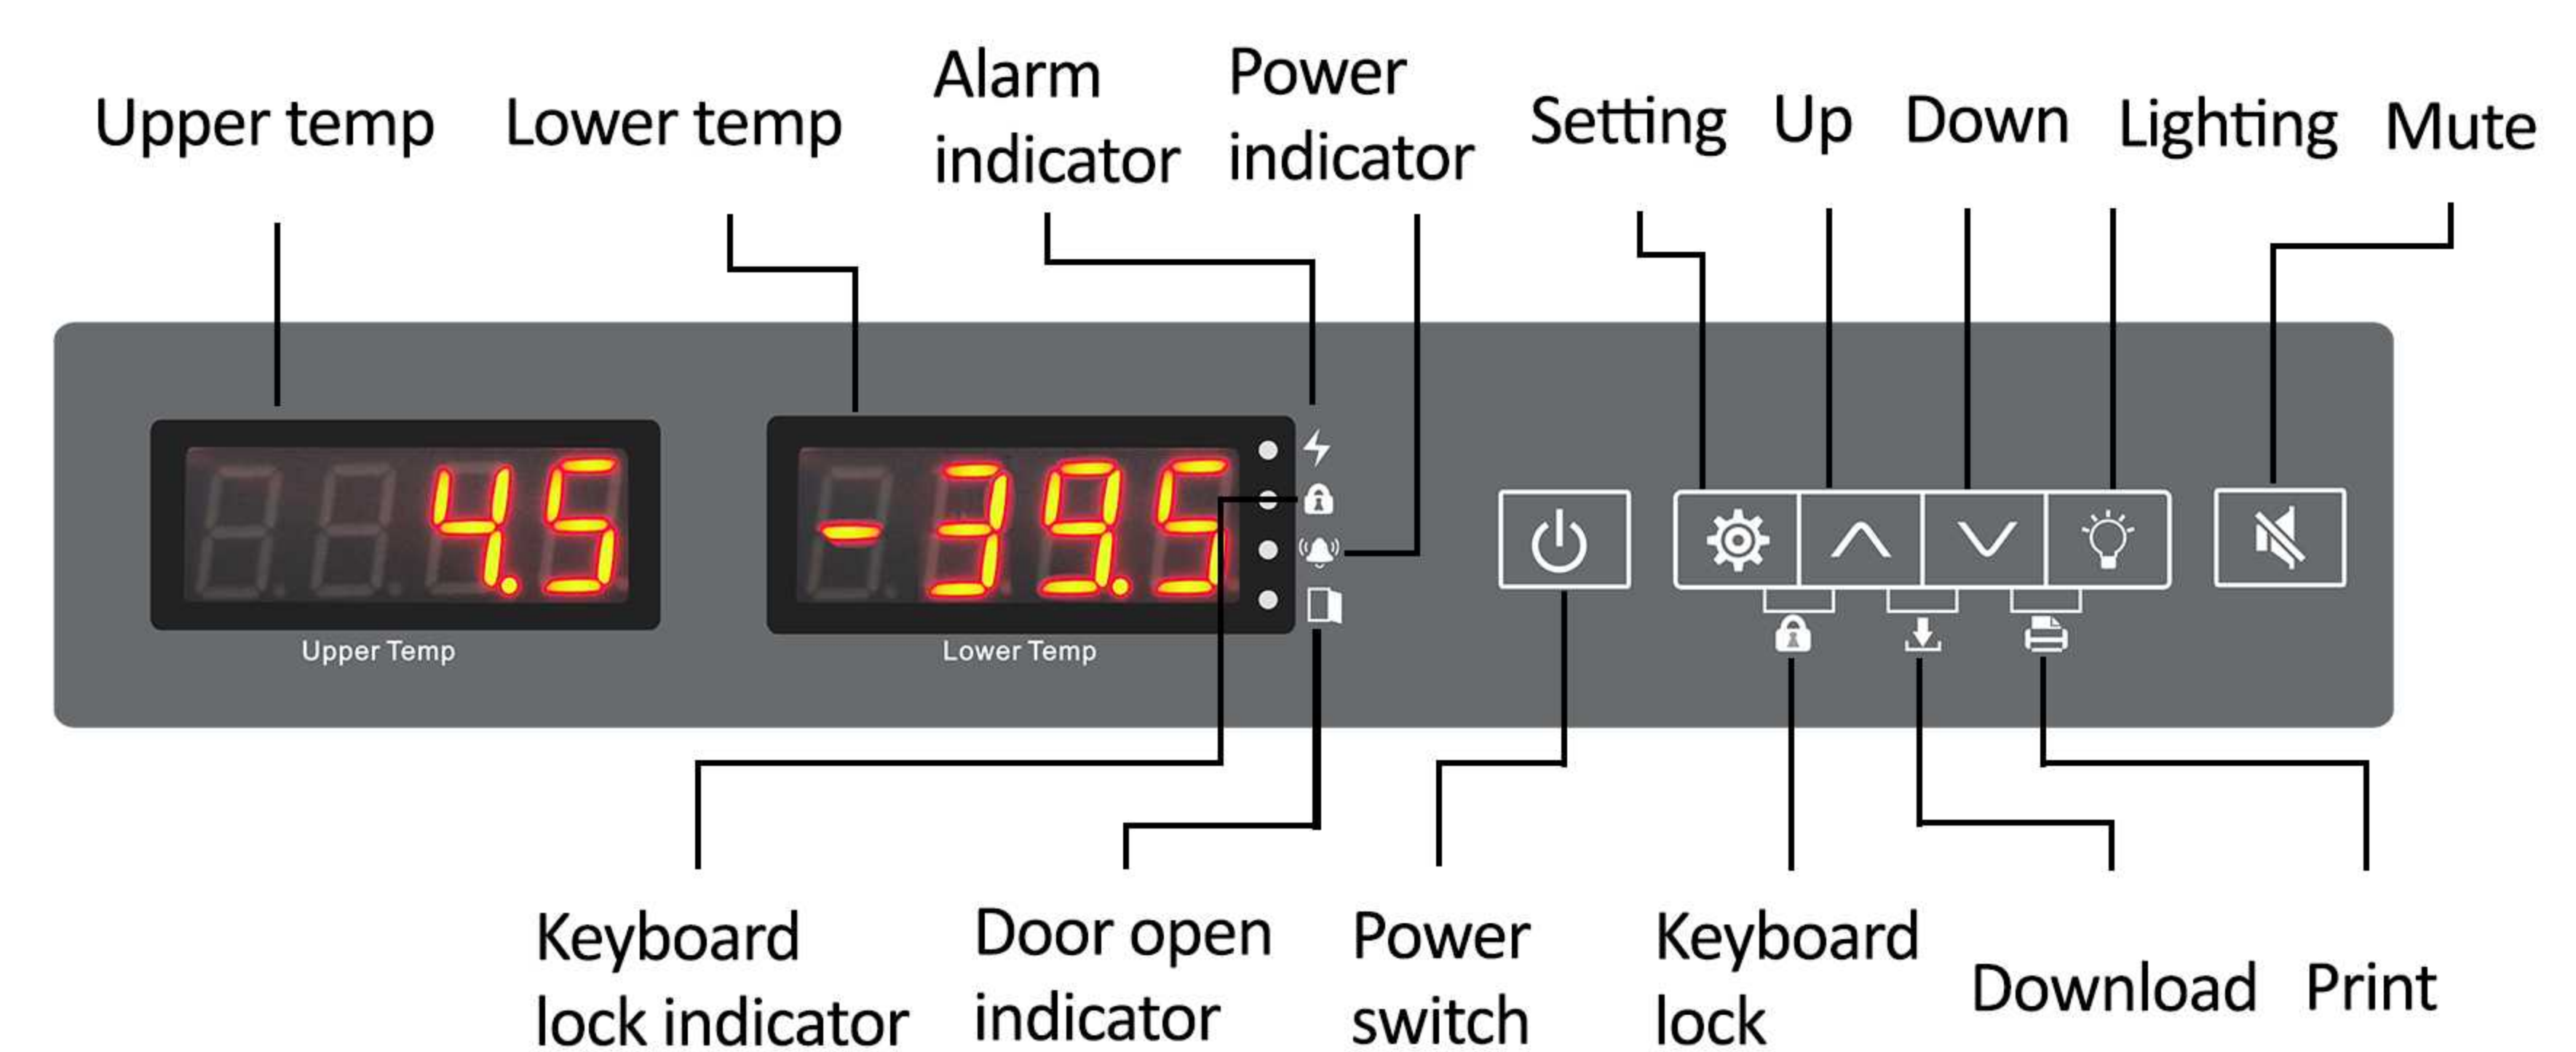

Z06-sx Controller

The temperature controller can accurately control the temperature of the two compartments and provide audible and visual alarms.

- › Pre-set : Refrigerator @ 5°C, Freezer @ -25°C/-40°C.
- › The precision of display and control is 0.1°C.
- › Audible and visual alarms : High/low temp, power failure, sensor error, door ajar, ambient temp, backup battery failure, and condenser fault.



Easy open handles



USB interface

FEATURES

» Forced air circulation

The forced-air circulation system of the refrigerator maintains uniform chamber temperatures and provide fast temperature recovery after door openings. The refrigerator compartment does not require a defrost cycle to maintain a constant temperature, ensuring that items are always stored at the desired temperature without interruption.

» Copper tube evaporator

The high-quality copper tube evaporator wrapped around the freezer cabinet improves the refrigeration efficiency of the cabinet and ensures more uniform temperature inside.

» Multiple applications

This type of refrigerator has a wide range of applications and provides practical value in clinics, blood stations, biological laboratories, hospital testing departments. It is suitable for applications with limited space but a wide variety of storage.

» Variable large space

Refrigerator (273 liters) is equipped with 3 coated wire shelves and freezer (255 liters) with 2 coated wire shelves and 9 removable drawers.

MRF-40V368 / MRF-25V368



MRF-40V368

MRF-25V368



FEATURES

» Dual cooling system

The specially designed dual-system biomedical freezer contains two independent refrigeration systems (two compressors, two condensers, two control systems).

» Z06-sx Controller

The temperature controller can accurately control the temperature of the two compartments and provide audible and visual alarms.

» Variable space

Refrigerator (183 liters) is equipped with 3 coated wire shelves (adjustable) and freezer (185 liters) with 2 coated wire shelves and 9 removable drawers.

» Internal USB data logger

For monitoring, recording and exporting temperature & alarm data through a built-in USB interface.

» Foamed glass door

The refrigerator compartment is equipped with a foamed glass door, which is electrically heated and has anti-fog and anti-condensation features.

» High-quality materials

The unit are made of high-quality coated cold-rolled steel both exterior and interior, which is antibacterial, anti-corrosive, and easy to clean.



Easy open handles



Removable drawers





MRF-25V300



FEATURES

» Precise Controller

The temperature controller can accurately control the temperature of the two compartments and provide audible and visual alarms.



» Forced air circulation

The forced-air circulation system of the refrigerator maintains uniform chamber temperatures and provide fast temperature recovery after door openings. The refrigerator compartment does not require a defrost cycle to maintain a constant temperature, ensuring that items are always stored at the desired temperature without interruption.

- » Pre-set : Refrigerator @ 5°C, Freezer @-25°.
- » The precision of display and control is 0.1°C.
- » Audible and visual alarms : High/low temp, power failure, sensor error, door ajar, and controller failure.

» Variable space

Refrigerator (198 liters) is equipped with 2 coated wire shelves (adjustable) and freezer (102 liters) with 3 drawers.



Smart lighting on and off for convenient access

» Lockable cabinets

The unit standard equipped with a built-in lock, provides a secure storage space for your preservations.




3-Drawer design in the freezer

» High-quality materials

The exterior is made of high-quality coated cold-rolled steel and interior made of HIPS.

SPECIFICATION SHEET

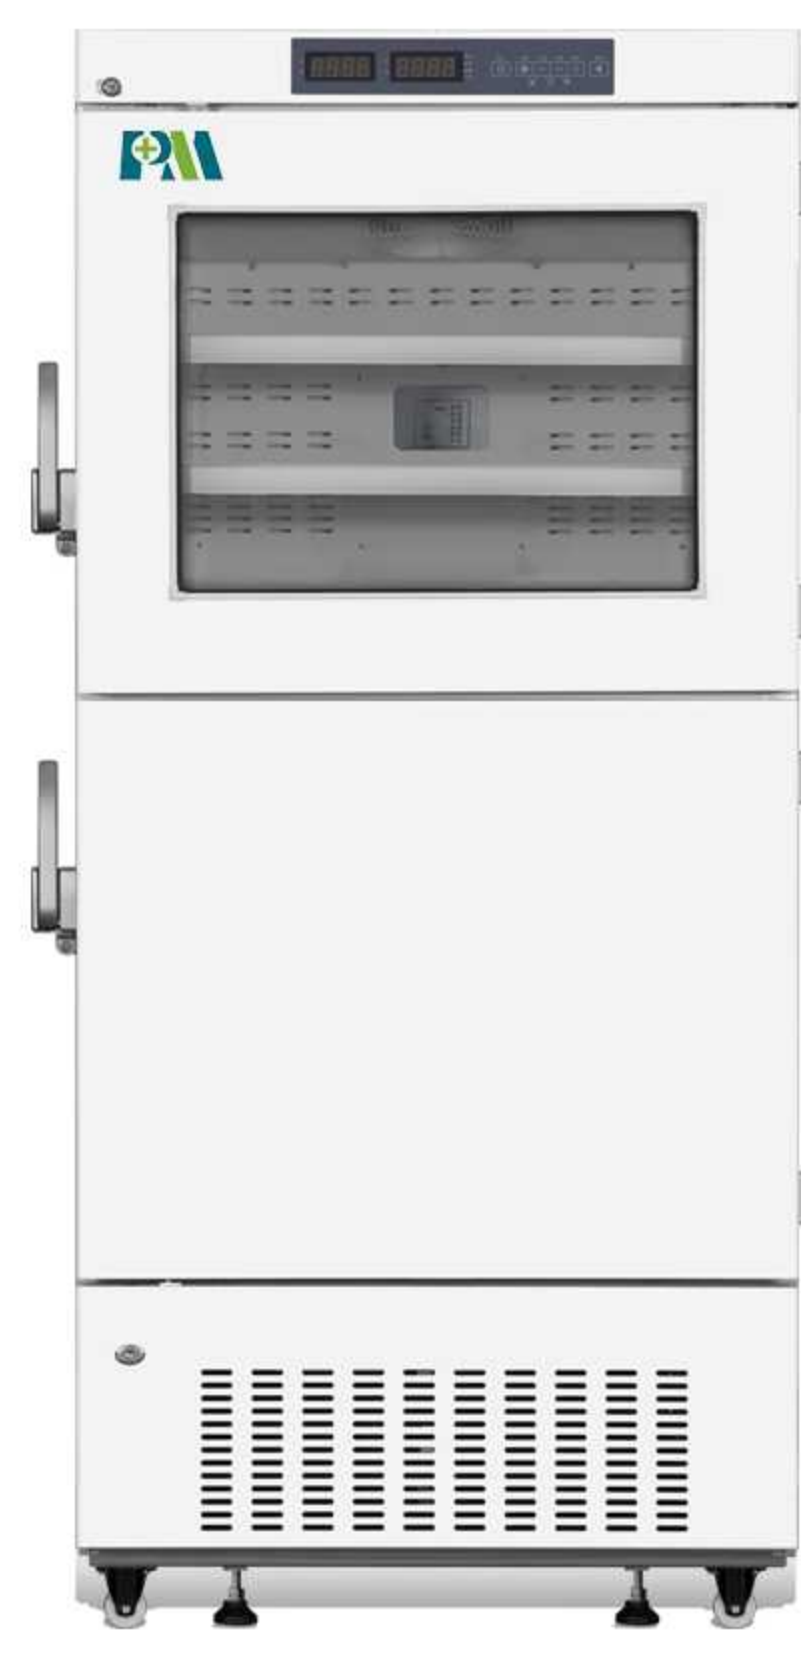

Model	MRF-40V528	MRF-40V368	MRF-25V528	MRF-25V368	MDF-25V300
Shelf/drawer QTY	Shelves/5 drawers/9	Shelves/5 drawers/6	Shelves/5 drawers/9	Shelves/5 drawers/6	Shelves/2 drawers/3
Cooling system	Forced air Copper tube	Forced air Copper tube	Forced air Copper tube	Forced air Copper tube	Forced air Copper tube
Defrost	Ref: Auto Fr: Manual	Ref: Auto Fr: Manual	Ref: Auto Fr: Manual	Ref: Auto Fr: Manual	Ref: Auto Fr: Manual
Refrigerant	Ref: R600a Fr: R290	Ref: R600a Fr: R290	Ref: R600a Fr: R290	Ref: R600a Fr: R290	Ref: R290 Fr: R290
Noise(db)	52	50	52	50	49
Ambient temperature (°C)	10~32°C	10~32°C	10~32°C	10~32°C	10~32°C
Temperature range (°C)	Ref: 2 ~ 8°C Fr: -20 ~ -40°C	Ref: 2 ~ 8°C Fr: -20 ~ -40°C	Ref: 2 ~ 8°C Fr: -10 ~ -25°C	Ref: 2 ~ 8°C Fr: -10 ~ -25°C	Ref: 2 ~ 8°C Fr: -10 ~ -25°C
Compressor QTY	2	2	2	2	2
Sensor	NTC	NTC	NTC	NTC	NTC
Temperature controller	Microprocessor	Microprocessor	Microprocessor	Microprocessor	Microprocessor
Display	LED digital display	LED digital display	LED digital display	LED digital display	LED digital display
Voltage(V)	187~242	187~242	187~242	187~242	187~242
Frequency(Hz)	50Hz	50Hz	50Hz	50Hz	50Hz
Power Consumption(kWh/24h)	7.0	6.8	5.5	3.0	2.9
Power (W)	527W	430W	431W	300W	349W
Internal material	Coated steel	Coated steel	Coated steel	Coated steel	HIPS
External material	Coated steel	Coated steel	Coated steel	Coated steel	Coated steel
Insulation	CFC-free PURF	CFC-free PURF	CFC-free PURF	CFC-free PURF	CFC-free PURF
Capacity (L/cu.ft)	528/18.64 Ref: 273/9.64 Fr: 255/9.0	368/12.99 Ref: 183/6.46 Fr: 185/6.53	528/18.64 Ref: 273/9.64 Fr: 255/9.0	368/12.99 Ref: 183/6.46 Fr: 185/6.53	300/10.59 Ref: 198/6.99 Fr: 102/3.60
NT./GT.(kg)	174/194	135/175	160/180	138/178	100/120
Exterior size(W*D*H)(mm)	900*818*1870	720*830*1870	900*818*1875	720*830*1870	673*676*1886
Interior size(W*D*H)(mm)	765*640*635	580*626*625	765*640*635	580*626*625	565*480*759
Package size(W*D*H)(mm)	651*636*635	466*636*625	651*636*635	466*636*625	461*465*600
Shipping CBM	921*960*1950	775*920*1990	921*960*1950	780*920*1990	720*695*2015
20GP/40GP/40HQ	1.8	1.4	1.8	1.4	1.0
High/low temperature	12/24/24	18/39/39	12/24/24	18/39/39	21/48/48
High/low temperature	Y	Y	Y	Y	Y
Power failure	Y	Y	Y	Y	Y
Controller failure	Y	Y	Y	Y	Y
Filter check	N/A	N/A	N/A	N/A	N/A
Sensor error	Y	Y	Y	Y	Y
Low battery	N/A	N/A	N/A	N/A	N/A
Condenser fault	Y	Y	Y	Y	N/A
Ambient temperature	Y	Y	Y	Y	N/A
Door ajar	Y	Y	Y	Y	Y
Power failure backup	8 hours	8 hours	8 hours	8 hours	8 hours
Castor	Y	Y	Y	Y	Y
leveling feet	Y	Y	Y	Y	N/A
Access port Qty/diameter	2/25mm	2/25mm	2/25mm	2/25mm	1/25mm
USB Interface	Y	Y	Y	Y	N/A
Remote alarm port	Optional	Optional	Optional	Optional	Optional
Door type	Ref: Foamed glass Fr: Solid	Ref: Foamed glass Fr: Solid	Ref: Foamed glass Fr: Solid	Ref: Foamed glass Fr: Solid	Ref: Solid Fr: Solid
Chart recorder	N/A	N/A	N/A	N/A	N/A
Data logger	Optional	Optional	Optional	Optional	Optional
AISI 304 interior	Optional	Optional	Optional	Optional	N/A

Specifications

Cooling system

Power

Materials

Measurement

Alarms

Accessories



Anhui Zhongke Duling Commercial Appliance Co.,Ltd

No. 1 Hexianghu road, Changfeng, Hefei, Anhui, China

info@zkduling.com

www.metherbiomedical.com



Mether biomedical